


FORTRESS™

COUPLER LOCK

Instructions for Use

1. To install the FORTRESS® , insert the key and rotate it clockwise to the 3:00 (1/4 turn) position to release the shackle from the lock bar.
2. Open the coupler latch on the trailer.
3. Place the lock bar into the coupler with the detent ball up inside the coupler socket, and the lock facing forward.
4. Close the coupler latch.
5. Slide the shackle down through the lock bar until both lock bar and shackle are tight to the trailer coupler. For highest security, the top bend of the shackle should be pointing toward the trailer body whenever possible.
6. Rotate the key back to the 12:00 position to remove it from the lock. Do not force the key (in either direction). 'Jiggle' the lock bar and shackle slightly if needed to align the lock teeth and shackle to release the key.
7. To remove the lock, insert the key and turn it to the 3:00 position. Pull the shackle up out of the lock bar. Open the coupler latch and release the lock bar.
8. Regularly apply a light weight oil or spray-type lithium grease to the lock cylinder and latch rods. We recommend a few drops of good quality air-tool oil.

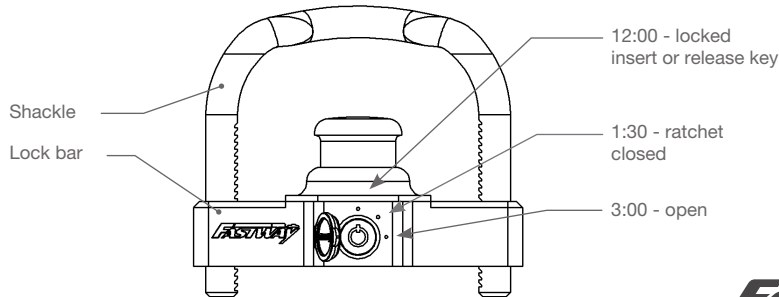

Limited Lifetime Warranty

Progress Mfg. Inc. warrants the Fastway FORTRESS Coupler Lock against latent defects in materials and workmanship under normal use and service, ordinary wear and tear, chrome, and corrosion are excepted, from the first date of purchase at retail for the ownership life of the original purchaser. If this product is latently defective it will be replaced or repaired when a proper return authorization is obtained and the product is returned with transportation charges prepaid to the Progress Mfg. Inc. manufacturing plant. Progress Mfg. Inc. shall not be required to replace or repair any products damaged as a result of improper installation, alteration, unreasonable use, forced removal, or improper maintenance. This warranty does not include labor charges nor does it include transportation charges for returning the product to the consumer. To the extent allowed by law, Progress Mfg. Inc. shall not be liable for any incidental, consequential, or any other damages including, without limitation, breach of any implied warranty, merchantability, or fitness for a particular purpose of any Fastway product. In no event shall Progress Mfg. Inc. be liable for any damages other than the replacement or repair of the affected part. Authorization and warranty procedure may be obtained by calling Progress Mfg. Inc. customer support at 877-523-9103.

FASTWAY
TRAILER PRODUCTS

FSIN0318



FLASH™ BALL MOUNTS

Strong enough for your heaviest toys, yet light weight and easy to use.



ONESTEP™

Virtually eliminates unwanted wheel movement providing the most stability for your trailer.



FLIP™

Save time and effort by extending your trailer jack by six inches, eliminating fifty cranks both up and down.



ZIP™

Protect your fingers from loose sharp wire, and provide a safer and more effective connection to your trailer.